


Multi-Component Dosing Unit SD-3KVD for Printing Ink




Advantages of the new system

- Injection of drying agent to the printing ink just before the filling into cartridges
- Dosing range infinitely variable (e.g. 0,5 – 3 Vol. %)
- Flow meters to secure the dosing of drying agent in every cycle
- exact parallel dosing of the base material and all other components (same start and end of each stroke), due to controlled injection valves
- Dosing Unit SD-3KVD, in its basic execution, is equipped with 2 satellites
- Final deaeration process by means of the triple roller mill is no longer necessary
- Cleaning of pans and mixer is reduced to a minimum

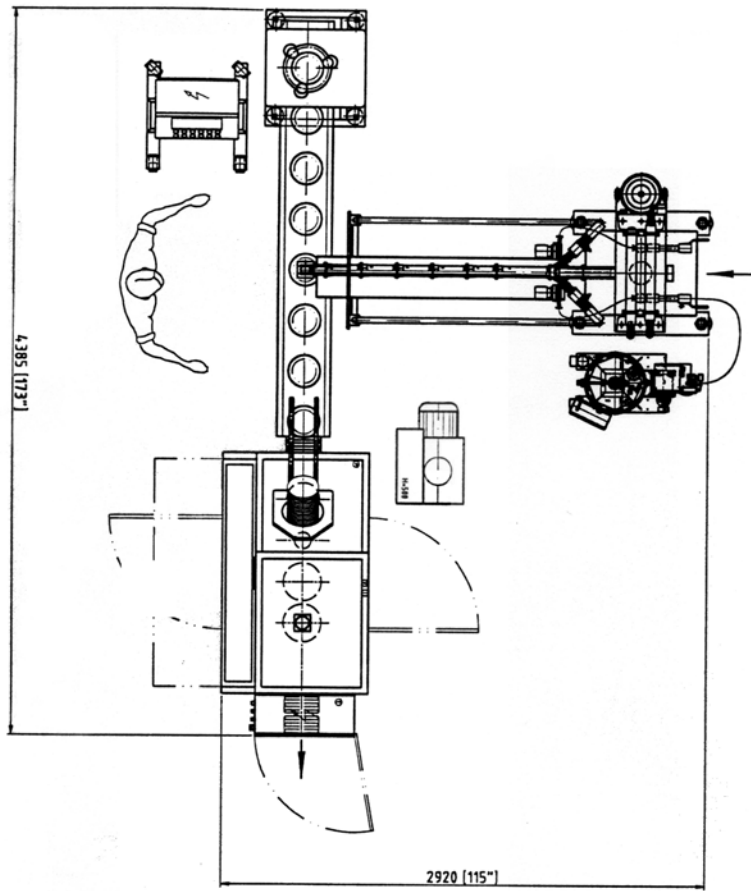

Alle Maßangaben sind ca. Maße in mm [inches"]
 All dimensions are approximative in mm [inches"]

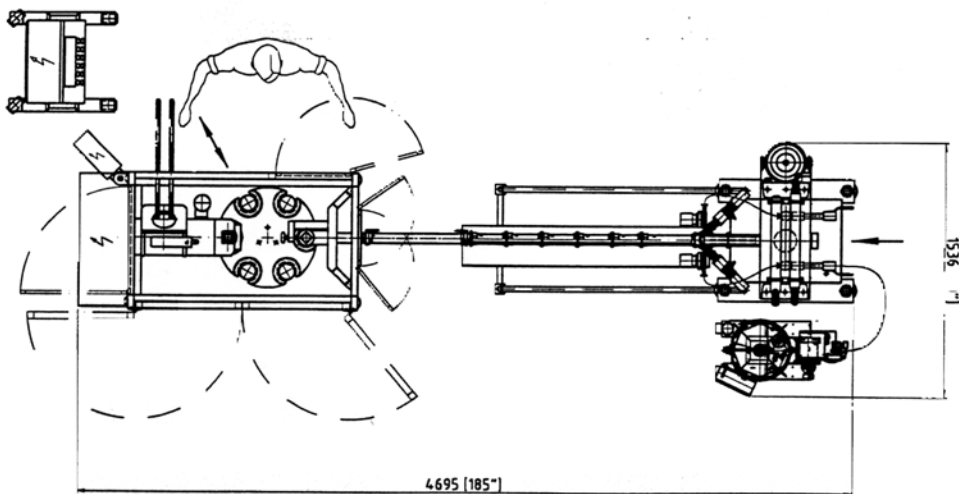

 **SCHWERDTEL**
 Filling Technology at its best

Ludwig Schwerdtel GmbH
 Boschstraße 8 . D-85757 Karlsfeld near Munich
 Fon: +49 8131 9006-0 . Fax: +49 8131 97 211
 info@schwerdtel.de . www.schwerdtel.de