


# Fully Automatic Gravimetric Can Filling and Closing Line “Compact”



for the filling of self-levelling products into 1 and 2,5 kg conical vacuum cans and vacuum closing of the cans

- All-in-one machine
- No influence of product viscosity / temperature
- Adjustable to various can diameters
- Clean product cut-off
- Automatic learning function
- Control system for spraying anti-drying agent
- Latest safety technology
- High output
- One operator only

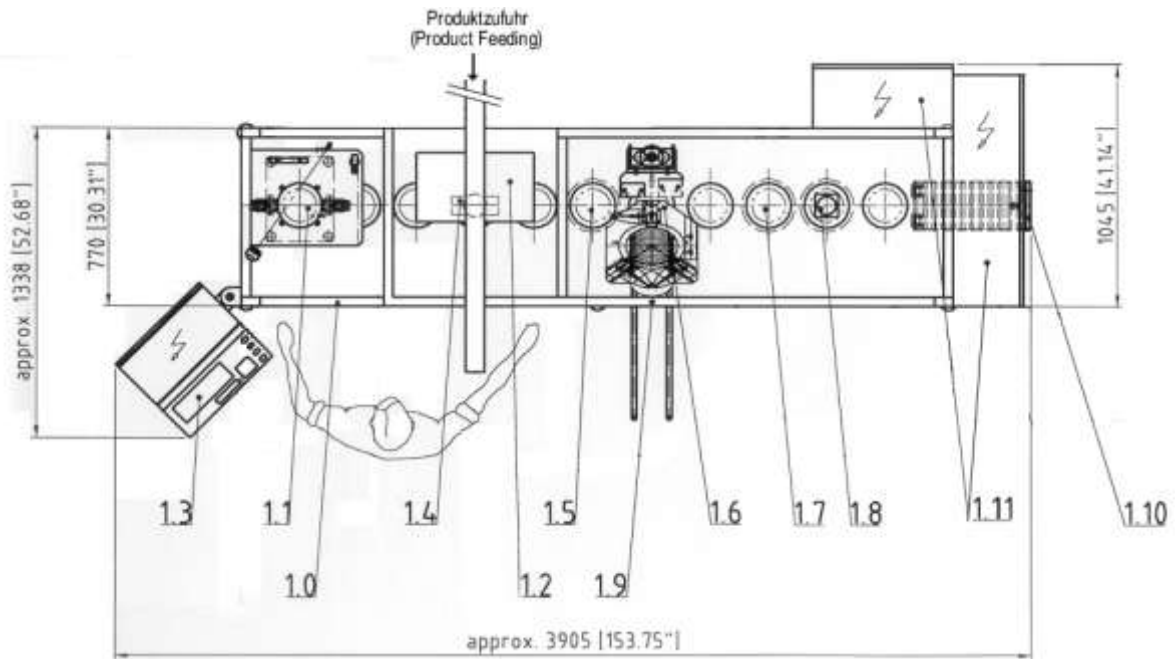

## 1.0 Can Filling and Closing Line „Compact“

### 1.1 Can depiler

### 1.2 Gravimetric Filling Head (mounted on rigid bracket)

### 1.3 Control Panel

### 1.4 Checkweigher

### 1.5 Anti-Drying Agent

### 1.6 Lid depiler

### 1.7 Evacuation and Inert Gas Station

### 1.8 Crimping Station

### 1.9 Vacuum Pump (inside the machine)

### 1.10 Discharge Roller Conveyor

### 1.11 Switch Cabinets

Technical Data	
<b>Machine type</b>	Can Filling and Closing Line „Compact“
<b>Measurements (L x W x H)</b>	approx. 3900 x 1050 x 2000 mm
<b>Weight</b>	approx. 1385 kg
<b>Output</b>	14 – 16 cans (1 kg) / min., depending on material viscosity and infeed rate
<b>Drive</b>	Pneumatic
Electrical Data	
<b>Main Voltage</b>	3 x 400 V, 50 Hz or according to local requirements
<b>Power input</b>	approx. 4 kW
<b>Control system</b>	Siemens S 7 PLC
<b>Protection system</b>	IP 44
Compressed air connection	
<b>Air pressure</b>	6 bar
<b>Air consumption</b>	approx. 35 Nm <sup>3</sup> /h for an output of 14 cans / min.
Inert gas connection	
<b>Inert gas connection</b>	Max. 2,5 bar



Ludwig Schwerdtel GmbH  
 Boschstraße 8 . D-85757 Karlsfeld / München  
 Fon: +49 8131 9006-0 . Fax: +49 8131 97 211  
 info@schwerdtel.de . www.schwerdtel.de