


# Cartridge Filler S 8-VHS



- Fully automatic high speed cartridge filling and closing unit with quadruple dosing station
- For plastic, metal and composite cartridges
- Air free vertical filling
- Perfect and easy adjustment according to product characteristics
- Output: up to 200 cartridges per minute

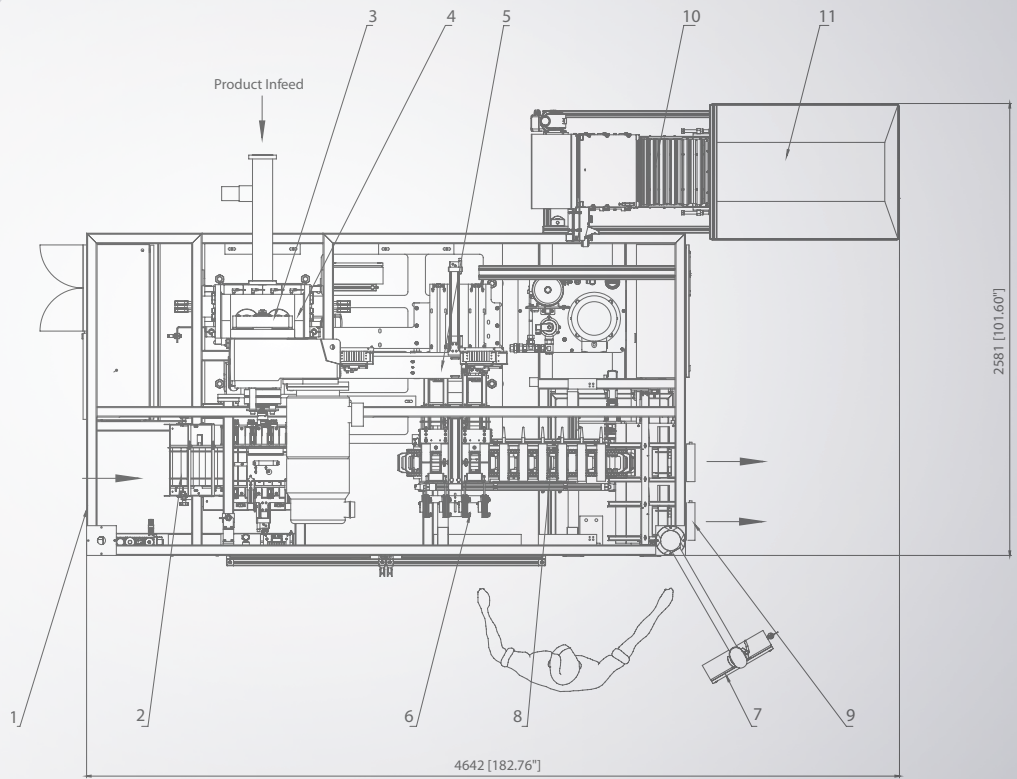

- 1 Cartridge Infeed
- 2 Cartridge Separating
- 3 Dosing Unit
- 4 Filling Station
- 5 Plunger Inserting Station
- 6 Plunger Control
- 7 Operator Panel
- 8 Turning Station
- 9 Cartridge Discharge
- 10 Plunger Elevator
- 11 Plunger Hopper

## Technical Data

### Machine Type

Dimensions (L x W x H) [cm]/[inch]  
 Weight [kg]/[lb US]  
 Output [cpm]  
 Drive System of Dosing Unit  
 Dosing Volume [ml]  
 Connecting height of product infeed [mm]/[inch]

### Cartridge Filling and Closing Machine S 8-VHS

3,500 x 2,000 x 2,750 / 138 x 79 x 108  
 4,400/9,700  
 up to 200 cartridges (310ml) per minute, depending on viscosity of product  
 electric  
 260-310  
 1,550/61

### Electrical Connections


Voltage  
 Power Requirement [kW]  
 Control System  
 IP Rating

3 x 400V, 50Hz (or according to local requirements)  
 40  
 Siemens SPS S7-300  
 IP 44

### Compressed Air Connections

Air Pressure [bar]/[psi]  
 Air Consumption [Nm<sup>3</sup>h]/[gal/h]

min. 6/88  
 122/32

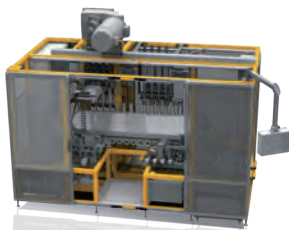

Ludwig Schwerdtel GmbH · Boschstrasse 8  
 D-85757 Karlsfeld near Munich  
 Tel: +49 8131 9006-0 · Fax: +49 8131 97211  
 info@schwerdtel.de · www.schwerdtel.de